


<b>Test report no.:</b> <i>Prüfbericht Nr.:</i>	<b>AU220276 001</b>	<b>Order No.:</b> <i>Auftrags-Nr.:</i>	<b>252104225</b>	Page 1 of 8 Seite 1 von 8
<b>Client Reference No.:</b> <i>Kunden-Referenz-Nr.:</i>	2071295	<b>Order date:</b> <i>Auftragsdatum:</i>	17-Feb-2022	
<b>Client:</b> <i>Auftraggeber:</i>	Aldridge Traffic Systems Pty. Ltd. 12-14 Leeds Street, Rhodes, NSW 2138, Australia			
<b>Test item:</b> <i>Prüfgegenstand:</i>	LED Street Light			
<b>Identification/ Type No.:</b> <i>Bezeichnung / Typ-Nr.</i>	P30W.N7PBP			
<b>Order content:</b> <i>Auftrags-Inhalt:</i>	Lamp Circuit Power (LCP) Measurement			
<b>Test specification:</b> <i>Prüfgrundlage:</i>	Refer to page 2			
<b>Date of sample receipt:</b> <i>Wareneingangsdatum:</i>	17-Feb-2022			
<b>Test sample No:</b> <i>Prüfmuster-Nr.:</i>	A003213425-001 to A003213425-010			
<b>Testing period:</b> <i>Prüfzeitraum:</i>	17-Feb-2022 - 22-Feb-2022			
<b>Place of testing:</b> <i>Ort der Prüfung:</i>	TUV Rheinland Australia Pty Ltd			
<b>Testing laboratory:</b> <i>Prüflaboratorium:</i>	TUV Rheinland Australia Pty Ltd			
<b>Test result*:</b> <i>Prüfergebnis*:</i>	Samples were submitted for measurement only, no compliance limits			
<b>tested by:</b> <i>geprüft von:</i>	<b>authorized by: /</b> <i>genehmigt von:</i>			
<b>Date:</b> 04-Mar-2022 <i>Datum:</i>	Umer Mansoor/		<b>Issue Date:</b> 04-Mar-2022 <i>Ausstellungsdatum:</i>	Daniel Ngo/
<b>Position / Stellung:</b>	Expert	<b>Position / Stellung:</b>	Expert	
<b>Other /</b> <i>Sonstiges:</i>	- Power consumption measurement at rated voltage for AEMO (Australian Energy Market Operator) at lab condition (Ambient (20±5)°C, Relative Humidity (45–75)%).			
<b>Condition of the test item at delivery:</b> <i>Zustand des Prüfgegenstandes bei Anlieferung:</i>	Test item complete and undamaged			
* Legend:	P(ass) = passed a.m. test specification(s)	F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet
<p><b>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</b></p> <p><i>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</i></p>				

**Test report no.: AU220276 001**

Page 2 of 8  
Seite 2 von 8

### Remarks

- 1 The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.
- 2 As contractually agreed, this document has been signed digitally only. TÜV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TÜV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged.
- 3 Test clauses with remark of \* are subcontracted to qualified subcontractors and described under the respective test clause in the report.  
Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.
- 4 Reporting of results herein is in accordance with NATA recommendations taking into account U of M.  
(a) For minimum limits - Where measurement is on the limit or above the limit it is deemed to comply. Where measurement is below the limit it is deemed not to comply.  
(b) For maximum limits - Where measurement is on the limit or below the limit it is deemed to comply. Where measurement is above the limit it is deemed not to comply.
- 5 For reporting of results the estimated uncertainty for measurement taken into account at 95% confidence level.
- 6 This test report is based on assessment and tests applied to the specific test item(s) as submitted by the client. TÜV Rheinland Australia disclaims any and all responsibility or obligation for any other item.
- 7 LCP test was conducted on 10 fittings as per requested schemes.

### History of revision:

N/A

### Options/accessories/ancillary equipment:

The equipment was tested without any optional accessory installed. Hence, this report does not cover parameters that are influenced by the installation of optional accessory that might affect safety in the meaning of this standard.

### Uncertainty of equipment used:

Equipment	Equipment No.	Range used	Uncertainty	Calibration Due Date
Digital Power Meter Model: WT310	MEL-1464	Voltage: 200V - 300V	±0.2V	12-Apr-2022
		Current: 250mA to 500mA	±0.3mA	
		Power: 115mW – 4.6kW	±2.5%	
		Power Factor: 1	±0.001pf	

### Test procedure:

The submitted test samples (consisted of the supplied lamp and control gear combination, if applicable) for the lamp circuit power consumption measurement were placed in a draught free room and at the laboratory condition (Ambient (20±5)°C, Relative Humidity (45–75)%) for 24 hours before and during the measurement.

The test samples were connected to the power source and supplied with voltage and frequency as listed in "TABLE: Power Measurement". The test samples were operated until the conditions of overall temperature equilibrium were established or at least 4 hours in stabilized operation with the supplied sources. Then the total power consumption measurements have been taken by power meter.

**Test report no.: AU22O276 001**

Page 3 of 8  
Seite 3 von 8

**Product description**

<b>1</b>	<b>Product details:</b>	LED Street Light Trademark / Manufacturer: Aldridge Traffic Systems Pty. Ltd. Model: P30W. N7PBP Rating: 230Vac 50Hz 0.135A 30W PF>0.9; IK08 IP65; CCT: 4000K
<b>2</b>	<b>Dimensions / Weight:</b>	Approx. Length [mm] x Width [mm] x Depth [mm]: 570 x 245 x 165 Approx. Weight [kg]: 5.05
<b>3</b>	<b>Operating elements:</b>	Built-in LED driver Trademark / Manufacturer: MEAN WELL Model: LPF-40D-36 Input rating: 100-240Vac; 50/60Hz; 0.6A; IP67 $\lambda$ : 0.95; $t_a$ : 50°C; $t_c$ : 80°C Output rating: +36Vdc; 1.12A
<b>4</b>	<b>Equipment / Accessories:</b>	N/A
<b>5</b>	<b>Used materials:</b>	N/A
<b>6</b>	<b>Other:</b>	Test sample(s), as well sample information, description, product details and intended usage was provided by customer.
<b>7</b>	<b>Test sample obtaining:</b>	<input checked="" type="checkbox"/> Sending by customer <input type="checkbox"/> Sampling by TÜV Rheinland Group <input type="checkbox"/> others:

**Test report no.: AU22O276 001**

Page 4 of 8  
 Seite 4 von 8


**TABLE: Power Measurement**

	Test Item	Supplied Voltage (V)	Frequency (Hz)	Measured Input Power (W)	Measured Input Current (mA)	Power Factor
1	P30W.N7PBP	250.15	50	29.168	128.34	0.9085
2	P30W.N7PBP	250.03	50	29.357	129.32	0.9080
3	P30W.N7PBP	250.14	50	29.085	128.03	0.9082
4	P30W.N7PBP	250.04	50	29.349	129.01	0.9098
5	P30W.N7PBP	250.22	50	29.175	128.40	0.9080
6	P30W.N7PBP	250.08	50	29.115	128.43	0.9065
7	P30W.N7PBP	250.04	50	29.108	128.23	0.9078
8	P30W.N7PBP	250.01	50	29.156	128.34	0.9087
9	P30W.N7PBP	250.02	50	29.107	128.04	0.9092
10	P30W.N7PBP	250.10	50	29.399	129.18	0.9099
<b>Average</b>		<b>250.083</b>	<b>50</b>	<b>29.2019</b>	<b>128.532</b>	<b>0.90846</b>

Test report no.: AU220276 001

Page 5 of 8  
Seite 5 von 8

Marking

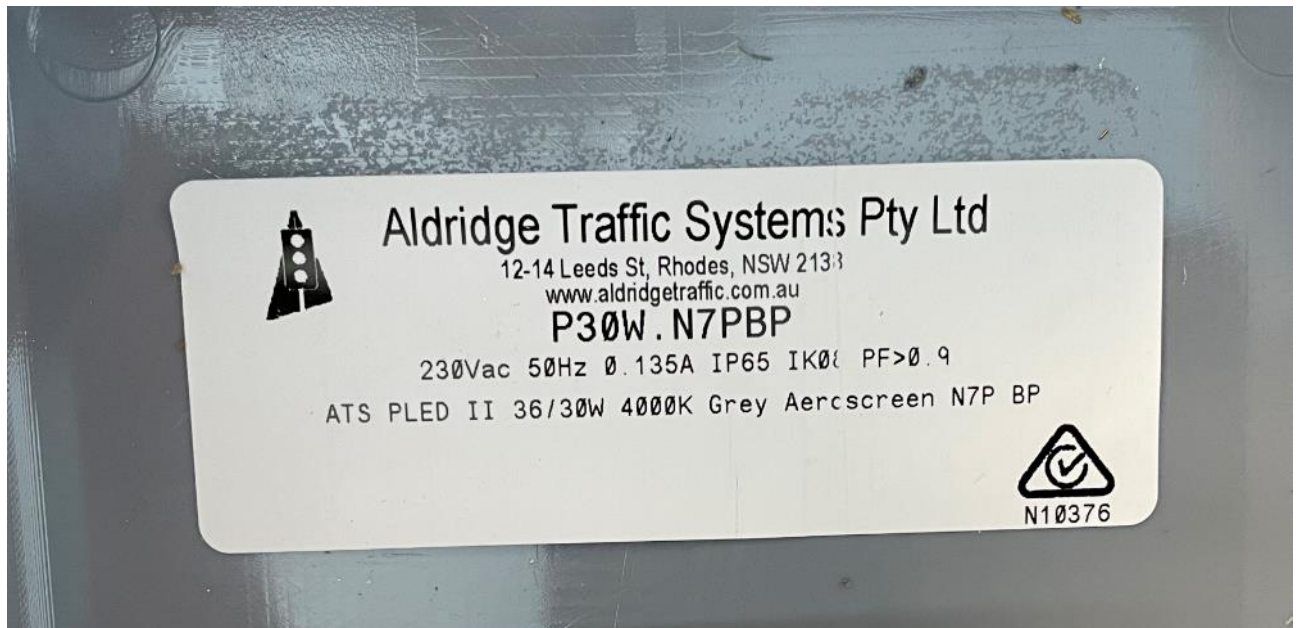

Rating label




Test report no.: AU22O276 001

Page 6 of 8  
Seite 6 von 8

Photo documentation



Product overview

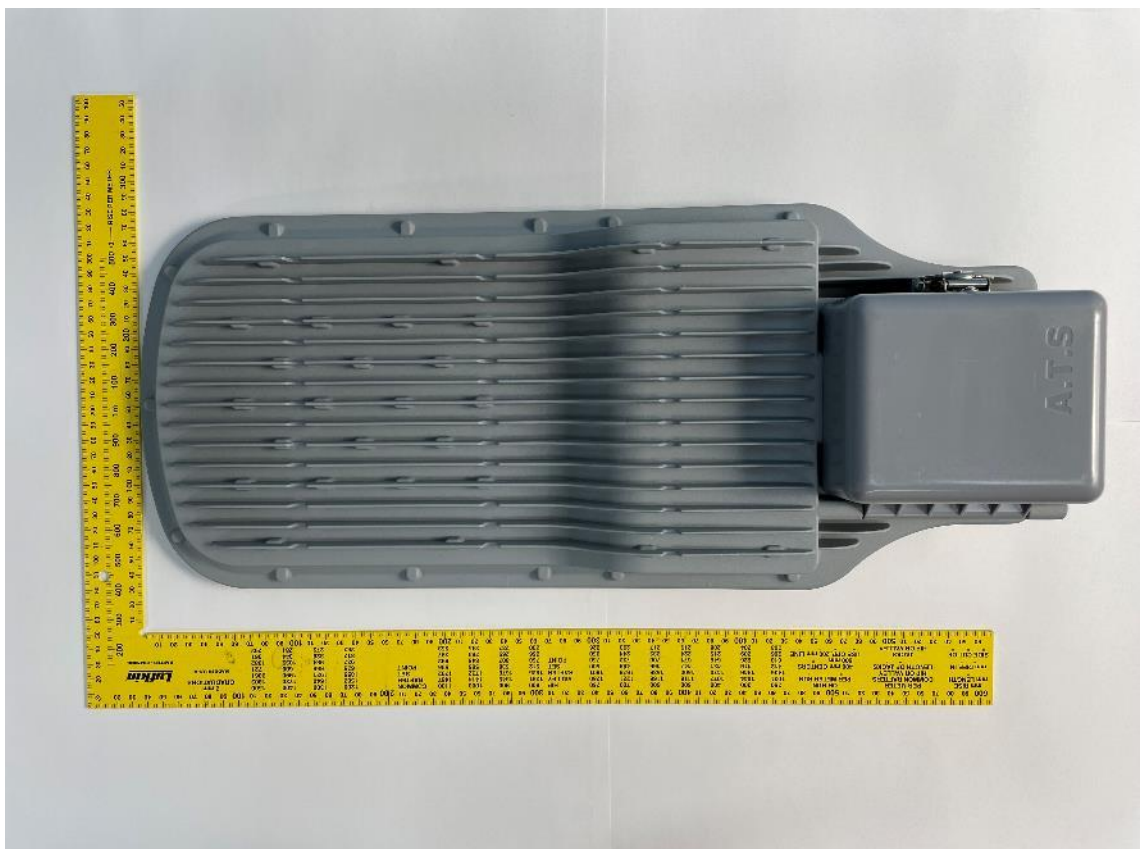


Product overview

Test report no.: AU220276 001

Page 7 of 8  
Seite 7 von 8

Photo documentation

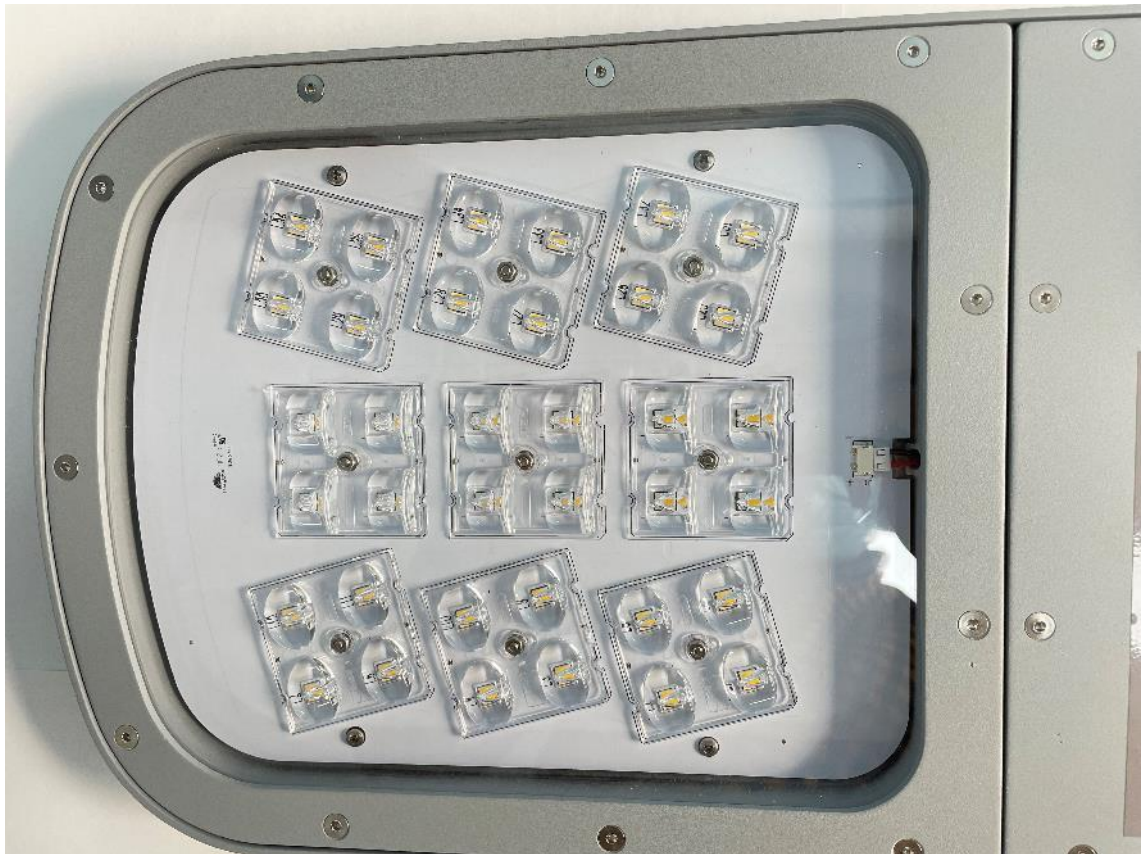

LED compartment



Terminal block for supply mains connection




Test report no.: AU220276 001

Page 8 of 8  
Seite 8 von 8

Photo documentation



Control gear compartment

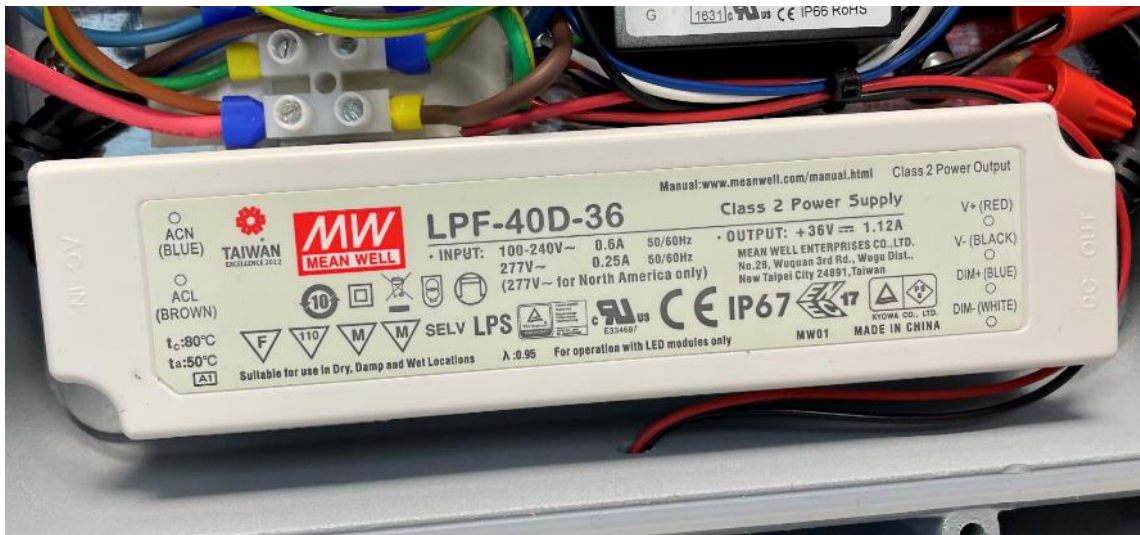

LED driver

End of test report