

# Andromeda™ C Pole Mount

SMALL CERAMIC POLE MOUNT LED LUMINAIRES



## PRODUCT INFORMATION

### LIGHT SOURCE HOUSING

Nichia High Power LED  
6063 Aluminium (Marine Grade)  
Ceramic Diode Seat with Polycarbonate Pixel Rails  
ST12

### BRACKET MATERIAL

### BRACKET TYPE

### FRAME COLOUR

### MECHANICAL IMPACT RESISTANCE

### IP RATING

### OPERATING TEMP

Pole Mount 60mm Diameter

Silver, White, Black

IK10

IP66

-40°C to 70°C

## TECHNICAL SPECIFICATIONS

### INPUT VOLTAGE

90-305VAC, 50/60Hz (Standard)

### DIMMABLE

Non-dimmable standard

### LIFESPAN

50,000 hours to L70

### POWER

20W, 25W, 30W, 40W

### POWER FACTOR

0.95

### BEAM ANGLE

Customisable - Refer to lens options page

IESNA Type I,II,III, IV & V distribution

### LUMINOUS EFFICACY

120 lm/W (Cool & Natural White)


110lm/W (Warm White)

### CCT

5,000-5,500K Cool White >70 (CRI) Standard

Additional Options - Frame options 304SS & 316SS. Dimmable with 0-10V, DALI, PE Cell or Nema 7.  
Varying input voltage including 24V DC to 480V. CCT Options - ~4000K Natural White & ~3000K Warm

## SCHEMATIC OF 20W/25W/30W/40W

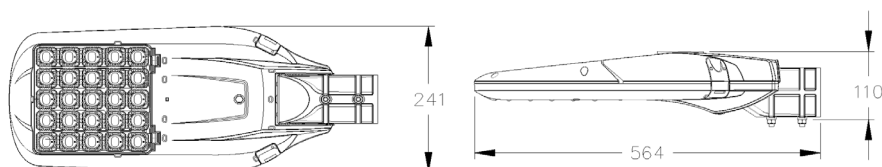

## TYPICAL APPLICATIONS

