

SERVICE LEVEL PROCEDURE:

Metering Provider Services Category B for Metering installation Types 1, 2, 3, 4, 5 and 6

PREPARED BY: Retail Markets and Metering

DOCUMENT NO: ME MP1962

VERSION NO: V4.3

PREPARED FOR: National Electricity Market

EFFECTIVE DATE: December 2014

DRAFT

Australian Energy Market Operator Ltd ABN 94 072 010 327

www.aemo.com.au info@aemo.com.au

Version Release History

VERSION	DATE	AUTHOR	PEER REVIEW	APPROVED	COMMENTS
1.0	Sept 2006	AEMO	MSWG	AEMO	Final Determination version.
2.0	Jan 2009	AEMO	MSWG	AEMO	Advanced Metering Roll out edit.
3.0	Feb 2010	AEMO	MSWG	AEMO	Update to AEMO Format
4.0	Oct 2011	AEMO	MSWG	AEMO	Updated to incorporate changes in National Electricity Rules Version 41 – Inclusion of MDP in the Rules
4.1	Oct 2011	John Wiskin	MSWG	AEMO	Updated to incorporate changes in National Electricity Rules Version 41 – Inclusion of MDP in the Rules – Revised Final Determination
4.2	August 2014	Lee Brown	MSWG	AEMO	Aligned procedure with the National Electricity Rules regarding meter churn.
4.3	November 2014	Lee Brown	MSWG	AEMO	Updated with feedback from participants and MSWG after first stage consultation.

 December 2014
 Page

 2
 of 35

Disclaimer

- (a) **Purpose** This document has been prepared by the Australian Energy Market Operator Limited (**AEMO**) for the purpose of complying with clause 7.14.1A of the National Electricity Rules (**Rules**).
- (b) Supplementary Information This document might also contain information the publication of which is not required by the *Rules*. Such information is included for information purposes only, does not constitute legal or business advice, and should not be relied on as a substitute for obtaining detailed advice about the *National Electricity Law*, the *Rules*, or any other relevant laws, codes, rules, procedures or policies or any aspect of the *National Electricity Market*, or the electricity industry. While *AEMO* has used due care and skill in the production of this document, neither *AEMO*, nor any of its employees, agents and consultants make any representation or warranty as to the accuracy, reliability, completeness, currency or suitability for particular purposes of the information in this document.
- (c) Limitation of Liability To the extent permitted by law, AEMO and its advisers, consultants and other contributors to this document (or their respective associated companies, businesses, partners, directors, officers or employees) shall not be liable for any errors, omissions, defects or misrepresentations in the information contained in this document or for any loss or damage suffered by persons who use or rely on this information (including by reason of negligence, negligent misstatement or otherwise). If any law prohibits the exclusion of such liability, AEMO's liability is limited, at AEMO's option, to the re-supply of the information, provided that this limitation is permitted by law and is fair and reasonable.

© 2014 - All rights reserved.

December 2014 Page 3 of 35

Table of Contents

1.	GE	NERAL	6
	1.1	Purpose	6
	1.2	INTERPRETATION	
	1.3	REGULATORY FRAMEWORK	
	1.4	References	
	1.5	DOCUMENT RESPONSIBILITY	
2.	ME	TERING PROVIDER OBLIGATIONS	8
		OBLIGATIONS	
	2.1 2.2	EXCLUSIONS	
^		TERING PROVIDER SERVICES	_
ა .			
	3.1	SERVICES	
	3.2	ENGAGEMENT OF METERING PROVIDERS	
	3.3	RESTRICTIONS ON METERING PROVIDERS	
	3.4	ACCREDITATION	
	3.5	DISPUTES	
	3.6	USE OF SUB-CONTRACTORS	
	3.7	Insurance Professionalism	
	3.8		
4.	PE	RFORMANCE	13
	4.1	METERING PROCESSES	
	4.2	REGISTRATION OF METERING INSTALLATIONS	
	4.3	CONNECTION POINT TRANSFER	
	4.4	NMI STANDING DATA REQUIREMENTS	
	4.5	METERING REGISTER	
	4.6	MSATS PROCEDURES	
	4.7	B2B PROCEDURES	
	4.8	METERING PROVIDER (MPA) INTERFACES	
	4.9	COMPLIANCE	
	4.10	GENERAL COMMISSIONING REQUIREMENTS	
	4.11	METER CHANGE PROCESS METERING INSTALLATION CHANGE PROCESS	
	4.12 4.13	PERFORMANCE REQUIREMENTS	
	4.13	REPORTING	
	4.14	CORRECTIVE ACTION	
	4.16	METER CHANGE INFORMATION REQUIREMENTS	
	4.17	NMI	
	4.18	MARKET PARTICIPANTS	
	4.19	RESPONSIBLE PERSON	
	4.20	NMI	
	4.21	MARKET PARTICIPANTS	
	4.22	ASSET MANAGEMENT PLANS	
	4.23	TESTING AND INSPECTION	
	4.24	MANAGEMENT OF METERING INSTALLATION FAULTS	
	4.25	TELECOMMUNICATIONS	
	4.26	Systems	
	4.27	QUALITY SYSTEMS	
	4.28	DISASTER RECOVERY	
	4.29	SECURITY REQUIREMENTS	28

Service Level Procedure: Metering Provider Services Category B for Metering Installation Types 1, 2, 3, 4, 5 and 6

3	1
3	0
2	_
2	-
2	_
2	9
2	9
2	8
2	8

1. GENERAL

This Service Level Procedure details the requirements that *Metering Providers* must comply with when undertaking installation, provision and maintenance services for *metering installation* types 1, 2, 3, 4, 5 and 6.

1.1 Purpose

- 1.1.1 This Service Level Procedure is established under clause 7.14.1A of the *Rules* and details the obligations, technical requirements, measurement process and performance requirements that are to be performed, administered and maintained by a *Metering Provider*.
- 1.1.2 This Service Level Procedure details the:
 - (a) Obligations and technical / operational requirements in the provision, installation and maintenance of the *metering installation* by a *Metering Provider*, and
 - (b) Obligations assigned to the *Metering Provider* in support of the *responsible person* in order to comply with the *Rules*.
- 1.1.3 This document also refers to the requirements for:
 - (a) Accreditation of Metering Providers (category B);
 - (b) Compliance with the Rules and related procedures under the Rules; and
 - (c) The encouragement of good work practices.
- 1.1.4 This Service Level Procedure relates to category B *Metering Providers* (MPB), which are *Metering Providers* who are accredited to undertake the provision, installation and maintenance of various *metering installation* types as stipulated.
- 1.1.5 While this Service Level Procedure relates to formal obligations under the *Rules*, they should also be used as a "good practice" guide for all *metering installations* and operations.
- 1.1.6 This Service Level Procedure sets out the minimum requirements for a *Metering Provider* to be compliant with the *Rules* and procedures under the *Rules*.

1.2 Interpretation

- 1.2.1 The definition of a *Metering Provider* is a person who meets the requirements listed in S7.4 of the *Rules* and has been accredited by and is registered with *AEMO* as a *Metering Provider*.
- 1.2.2 In this Service Level Procedure words that are shown in italics have the meaning specified in the *Rules*.
- 1.2.3 A reference in this Service Level Procedure to a provision in the *Rules* is taken to be a reference to that provision as renumbered from time to time.
- 1.2.4 In this Service Level Procedure words in the singular include the plural and words in the plural include the singular.
- 1.2.5 In this Service Level Procedure diagrams are provided as an overview. If there are ambiguities between a diagram and the text, the text shall take precedence.

1.3 Regulatory Framework

1.3.1 In accordance with clause 7.4.1(a) of the *Rules*, the provision of *Metering Provider services* must only be carried out by a *Metering Provider*.

December 2014 Page 6 of 35

- 1.3.2 In accordance with clause 7.4.2 (a) (2) of the Rules, a Metering Provider must be accredited by AEMO and registered in that capacity in accordance with the qualification process.
- 1.3.3 In accordance with clause 7.4.2 (bb) of the Rules, a Metering Provider must comply with the provisions of the Rules and procedures authorised under the Rules.

1.4 References

- 1.4.1 In this Service Level Procedure, a reference to a procedure includes the following:
 - NMI Procedure, is a reference to the latest version of the "National Metering" a) Identifier Procedure":
 - 'metrology procedure' is a reference to the Metrology Procedure: Part A or b) Part B:
 - 'MSATS Procedures' is a reference to any one or all of the following documents in accordance with the context of the provision;
 - 'CATS Procedure' is a reference to the 'CATS Procedures Principles i. and Obligations':
 - 1) 'WIGS Procedure' is a reference to the Procedures for the Management of Wholesale, Interconnector, Generator and Sample (WIGS) NMIs; and
 - 2) 'NMI Standing Data' is a reference to the static metering data held within MSATS as detailed in the 'Standing Data for MSATS' document.
 - 'B2B Procedures' is a reference to any one or all of the following documents d) in accordance with the context of the provision:
 - 'Customer and Site Details Notification Process'; and i.
 - ii. 'Service Order Process'.
 - 'FRMP Churn Procedure' is a reference to the 'Meter Churn Procedures' for financially responsible Market Participants'; and
 - 'Service Level Procedure' is a reference to this document.
- 1.4.2 The document "The Role of the responsible person1" published by AEMO should also be referred to as many of the compliance activities for the responsible person are undertaken via the Metering Provider.

1.5 **Document Responsibility**

- 1.5.1 In accordance with clauses 7.1.3, 7.1.4 and 7.14.1A of the Rules, AEMO is responsible for:
 - Preparing the Service Level Procedure in accordance with Rules consultation procedures;
 - Revising the Service Level Procedure in accordance with Rules consultation procedure; and
 - Publishing the Service Level Procedure.
- 1.5.2 The Service Level Procedure must be available for public access on the AEMO website

December 2014 Page

of 35

¹ Available from the AEMO website.

1.5.3 Where AEMO considers a proposed amendment to the Service Level Procedure is of a minor or administrative nature, AEMO is not required to undertake consultation in accordance with the Rules consultation procedures but must comply with the requirements of clause 7.1.4 (e) of the Rules.

2. METERING PROVIDER OBLIGATIONS

2.1 **Obligations**

- 2.1.1 The Metering Provider is required to provide the metering installation, provision and/or maintenance services for all components of metering installations for which they are contracted and for which they are nominated as a *Metering* Provider in MSATS.
- 2.1.2 Subject to exclusions that are defined in clause 2.2 of this procedure, all category B Metering Providers must comply with this Service Level Procedure.
- 2.1.3 A Metering Provider must comply with the metrology procedure.
- 2.1.4 The Metering Provider has responsibility for the provision of metering services for all connection points for which they are the nominated Metering Provider in MSATS.
- 2.1.5 The Metering Provider must remain compliant with all applicable MSATS Procedures.
- 2.1.6 The Metering Provider must maintain and operate an interface with the MSATS system for delivery of relevant NMI Standing Data to the metering database.
- 2.1.7 The Metering Provider must conform to AEMO's NMI Procedure.
- 2.1.8 The Metering Provider must remain compliant with all applicable B2B Procedures.

2.2 **Exclusions**

- 2.2.1 Metering Providers Category B who perform work on metering installations at wholesale boundary points located within substations, undertaken on behalf of a Transmission Network Service Provider, are exempted from literal compliance with this Service Level Procedure provided the metering work satisfies the performance and quality outcomes of this Service Level Procedure. The complexity of work at these connection points is such that the specialist requirements for undertaking the *metering installation* work, in addition to the security, test and commissioning processes involved, are considered to match or exceed this Service Level Procedure.
- 2.2.2 For service provision at connection points where the Metering Provider and the Metering Data Provider are part of the same company and metering installation, provision or maintenance work is performed using internal processes and procedures, those internal processes and procedures will be deemed to be compliant with this Service Level Procedure if the metering work satisfies the performance and quality outcomes of this Service Level Procedure.

Page

3. METERING PROVIDER SERVICES

3.1 **Services**

- 3.1.1 The Metering Provider is responsible for the provision of metering services to provide, install and maintain a metering installation, which includes, but is not limited to:
 - The provision, storage and maintenance of metering register information. a)
 - Maintain the ongoing *metering installation* compliance with the *Rules*, procedures under the Rules and relevant metrology procedure
 - The provision and maintenance of physical *metering installation* security c) controls:
 - The provision, installation and maintenance of the *metering installation*; d)
 - The maintenance of *metering installation* password security:
 - f) The development and maintenance of a Metering Asset Management Plan; and
 - The support of the audit process of *metering installations* and centralised review process undertaken by AEMO.
- 3.1.2 Even though a Metering Provider may perform certain obligations on behalf of the responsible person, the responsible person has overall responsibility for the metering installation.

3.2 **Engagement of Metering Providers**

- 3.2.1 The Rules provide a basis for Metering Providers to be engaged by the responsible person. The responsible person must ensure that all facets of the metering installation are maintained and may engage any number of Metering Providers to undertake the different components of work for each metering installation (e.g. to design the installation; install instrument transformers; install meters; install data communications; conduct tests; conduct ongoing maintenance).
- 3.2.2 Metering Providers are required to be registered with AEMO, and have the specific qualifications and the capability to meet the defined performance standards.

3.3 **Restrictions on Metering Providers**

- 3.3.1 No Market Generator or Market Customer which is involved in the trading of energy may be registered as a Metering Provider for connection points in respect of which the metering data relates to its own use of energy; and
- 3.3.2 If a Market Participant is a Market Customer and also a Network Service Provider, then the Market Participant may register as a Metering Provider for that connection point in accordance with the requirements of clause 7.4.2(d) and 7.4.2(e) of the Rules.

3.4 Accreditation

- 3.4.1 Metering Providers providing services in the National Electricity Market must be accredited by and registered with AEMO.
- 3.4.2 The accreditation requirements are set out in the accreditation checklists for each category of *metering installation* and include requirements as set out in:
 - a) Chapter 7 of the Rules; and

December 2014 Page

- b) Authorised procedures under the Rules.
- Circumstances where AEMO may require a Metering Provider to review its 3.4.3 accreditation and subsequently apply for re-accreditation may include:
 - Where a *Metering Provider* has been de-registered and seeks re-registration;
 - Where a *Metering Provider* has been suspended from providing services under certain categories and seeks to have the suspension lifted;
 - Subsequent changes to Rules requirements, Procedures under the Rules, or service level procedures. This is likely to apply in instances where Rules changes have been made or new versions of the metrology procedure have been issued which require significant functional system, process or procedural changes to be made by Metering Providers.
 - Significant changes or upgrades to the Metering Provider's existing systems or a system platform change. The Metering Provider must apply and be reaccredited prior to implementing the changes into their production

Page

- environment and accepting or transmitting any *market* transactions, in accordance with the Metering Service Provider Accreditation Procedure; and
- Organisational mergers and acquisitions.

3.5 **Disputes**

3.5.1 If a dispute arises between the Metering Provider and AEMO, a Registered Participant, a Metering Data Provider or any other Metering Provider, in relation to the provision of metering services or this Service Level Procedure, then the Dispute Resolution process as detailed in clause 8.2 of the *Rules* shall apply.

3.6 **Use of Sub-Contractors**

- 3.6.1 If an accredited Metering Provider intends to engage sub-contractors (who do not have Metering Provider accreditation) to perform any of their obligations, they must ensure that auditable processes are in place to certify that all work performed by the sub-contractor on behalf of the Metering Provider is compliant with the Rules and this Service Level Procedure.
- 3.6.2 While the Metering Provider may contract out metering work, the Metering Provider may not delegate any of their responsibilities under the Rules. The Metering Provider is responsible and liable for all acts and omissions of the subcontractor as if they were acts and omissions of the *Metering Provider*.

3.7 Insurance

- 3.7.1 The Metering Provider must effect and maintain for the duration of the Metering Provider's registration and accreditation:
 - a) General liability insurance; and
 - b) For a period of seven years after termination of the *Metering Providers* registration, professional indemnity insurance, for an amount of not less than \$10,000,000 total, covering potential claims against the *Metering Provider*.
- 3.7.2 The Metering Provider must provide AEMO with certified copies of the insurance policy required pursuant to this Service Level Procedure, when requested.

Professionalism 3.8

- 3.8.1 In order to achieve a common approach to services across Metering Providers and Metering Data Providers in the National Electricity Market, each Metering Provider must develop, document and apply its procedures for the services in cooperation with AEMO and each relevant responsible person and Network Service Provider to facilitate the effective management of relevant NMI Standing Data and metering data information flows.
- 3.8.2 Metering Providers must ensure that sufficient competent people are recruited and maintained in order to meet the Metering Provider's obligations and performance requirements.
- 3.8.3 Metering Providers must use reasonable endeavours to establish the necessary working relationships with other Metering Providers and Metering Data Providers to ensure that matters affecting customer transfer, meter installation, provision and maintenance, and maintenance of relevant NMI Standing Data are achieved proficiently.

Page of 35

Service Level Procedure: Metering Provider Services Category B for Metering Installation Types 1, 2, 3, 4, 5 and 6

Metering Providers must assist AEMO with reasonable requests for the 3.8.4 provisioning of *metering data* and relevant *NMI Standing Data* information relating to connection points that are part of the market audit process conducted by AEMO.

December 2014 Page of 35

4. PERFORMANCE

4.1 **Metering Processes**

- 4.1.1 Metering Provider General Requirements
 - a) Operation of the National Electricity Market requires the installation, provision, and maintenance of metering installations for the purposes of providing accurate recording of *energy* flows to facilitate associated financial transactions. These energy flows are metered using equipment provided, installed and maintained by Metering Providers; and
 - Metering register information and relevant NMI Standing Data management is to be updated and maintained and communicated to AEMO, as well as to Market Participants who have rights of access under the Rules.
 - Note: For the purpose of clarification, any clauses in this document that relate to a type 1, 2, 3 and 4 metering installation are taken to also apply to an interval *metering installation* with *remote acquisition* for a small customer (except for Victorian Advanced Metering Infrastructure (AMI) Rollout) until the metrological requirements are formalised through the National Smart Meter process.

Regulatory Knowledge 4.1.2

The Metering Provider is required to maintain current knowledge on the Rules, metrology procedure(s), Australian Standards, relevant International Electrotechnical Commission (IEC) standards, and all other relevant

December 2014 Page standards and codes (e.g. wiring regulation, jurisdictional documents, SIRs, etc.).

4.1.3 **Registration Process**

The Metering Provider role is essential to the successful collection of relevant NMI Standing Data and allocation of the relevant NMI Standing Data to Market Participants for registration processing purposes.

Meterina Provider Processes 4.1.4

- For the services that they provide, the *Metering Provider* must have processes and systems in place in the following areas:
 - Purchasing of *metering* equipment;
 - ii. Provision of *metering* equipment;
 - iii. Installation of *metering* equipment;
 - iv. Commissioning and verification of *metering* equipment;
 - ٧. Testing and inspection of *metering* equipment;
 - vi. Maintenance of *metering* equipment;
 - vii. Programming of *metering* equipment;
 - viii. Asset management planning;
 - Security of metering installations and energy data; ix.
 - Relevant NMI Standing Data management; Χ.
 - χi. Management of MSATS interface;
 - xii. Management of meter churn;
 - xiii. Support Management of B2B processes where required;
 - xiv. Communication links to AEMO, Market Participants and other service providers:
 - Quality system certification; XV.
 - xvi. Processes for the maintenance and update of relevant *Rules*, Licences, Procedures and Standards; and
 - xvii. Training and maintenance of resource skills.

4.2 **Registration of Metering Installations**

4.2.1 The metering registration process is to be coordinated by the Metering Provider in cooperation with the responsible person.

4.3 **Connection Point Transfer**

- 4.3.1 The Metering Provider is required to facilitate the timely commissioning of the metering installation and the confirmation of the metering installation details. The Metering Provider is required to conform to AEMO's procedures as amended from time to time.
- 4.3.2 In order to support the retail transfer of a connection point, the Metering Provider must comply with the appropriate provisions of the following procedures:
 - 'MSATS Procedures: CATS Procedures Principles and Obligations'. This document contains the principles governing consumer transfer, metering installation registration and NMI Standing Data management. The document

Page of 35

- also defines the identities and obligations placed on Market Participants arising from these principles;
- b) 'NMI Standing Data for MSATS'. This document contains information relating to NMI Standing Data requirements in MSATS; and
- 'NMI Procedure' is a reference to the latest version of the "National Metering Identifier Procedure".

NMI Standing Data Requirements 4.4

- 4.4.1 The Metering Provider is to establish and maintain a register of site details and parameters (relevant NMI Standing Data) for each specified metering installation as follows:
 - Adhere to the assignment protocol of the NMI for all connection point details a) and data streams:
 - Conform to the requirements of the 'MSATS Procedures: CATS Procedures Principles and Obligations' with respect to the transfer of a *connection point* and the update and maintenance of relevant NMI Standing Data information within MSATS system;
 - Conform to the requirements of the B2B Procedures where applicable for the provision of relevant NMI Standing Data and metering installation services;
 - Forward a sub-set of the relevant NMI Standing Data information to MSATS in support of the NMI Discovery process;
 - Store the relevant NMI Standing Data in a manner that facilitates an auditable process and an efficient exchange of information with MSATS, AEMO, Market Participants and other service providers; and
 - Maintain and update the MSATS system with the required relevant NMI Standing Data information as detailed within the MSATS Procedures.
- 4.4.2 AEMO will undertake performance monitoring on the quality of relevant NMI Standing Data, and compliance of Metering Providers to this Service Level Procedure.
- The character and syntax details relating to relevant NMI Standing Data 4.4.3 information is listed in the latest version of the AEMO document 'Standing Data for MSATS'. This document is available from the AEMO website.

4.5 **Metering Register**

- 4.5.1 The Metering Provider is required to maintain a metering register to contain the details as listed in S7.5.2 (b) sub clauses (5), (6) and (7) of the Rules.
- 4.5.2 The Metering Provider is required to provide the metering register information, as detailed above, on request to the respective Market Participants who have the right of access to the *metering register* information. Information held in the metering register is to be accessible on-line for a minimum of 13 months and may be archived after this period. The information must be retained for seven years. Archiving facilities are required to transfer data, no longer required, on-line at regular intervals (e.g. monthly) into a longer-term, but accessible storage. Retrieval mechanisms are required that allow the data to be recovered and reevaluated for review purposes. It is not a requirement that the information be retrieved to the original storage facility, but the retrieval mechanism must facilitate manual analysis and manipulation using the same processing rules as for the original metering register information.

4.6 **MSATS Procedures**

December 2014 Page 4.6.1 The Metering Provider must meet the obligations and performance requirements of the Metering Provider's role and functions as defined within the 'MSATS Procedures: CATS Procedures Principles and Obligations'.

4.7 **B2B Procedures**

4.7.1 The *Metering Provider* must meet the obligations and performance requirements of the Metering Provider's role and functions as defined within the Business to Business Procedures.

4.8 **Metering Provider (MPA) Interfaces**

- 4.8.1 Metering Providers category A (MPA) are Metering Providers who are accredited to undertake installation only of type 5 and 6 whole current meters. The responsible person is required to engage a Metering Provider or Metering Providers to undertake the provision, installation and maintenance of a metering installation. Where a Metering Provider category A is engaged by the responsible person to perform installation work only, the Metering Provider category B must, on behalf of the *responsible person*, ensure that processes are in place to ensure that interfaces with the Metering Provider category A are established to ensure that:
 - a) Provision of *metering* equipment is undertaken in a timely manner;
 - Transition of relevant metering installation relevant NMI Standing Data information into systems and processes are carried out; and
 - The *metering* equipment is maintained by inclusion in the relevant test strategy within the associated Metering Asset Management Plan.

4.9 Compliance

- 4.9.1 While the overall responsibility lies with the responsible person. Metering Providers are required to provide copies of test or commissioning details to any new Metering Provider or responsible person upon request.
- 4.9.2 The Metering Provider must ensure that the metering installation is installed and maintained in accordance with the *metrology procedure*.

General Commissioning Requirements 4.10

- 4.10.1 The Metering Provider must use reasonable endeavours to ensure that the metering installation is compliant and carry out the following metering installation commissioning checks.
- 4.10.2 Wiring checks
 - The Metering Provider must verify that the:
 - *Metering installation* equipment and associated wiring is correct;
 - ii. Metering installation complies with manufacturer requirements, relevant standards and jurisdictional documents;
 - All wiring terminations are tight and correctly terminated: iii.
 - Cable type and sizes used are correct; and iv.
 - Phase sequence and polarity are correct.

4.10.3 Accuracy requirements

The Metering Provider must establish that the accuracy class of all the metering equipment associated with an metering installation and any documentation verifying the errors of current transformers, voltage

December 2014 Page 16 of 35

- transformers and meters show compliance with the Rules. The name plate data reflects the design accuracy class of the *metering* equipment.
- The Metering Provider must carry out all reasonable directions of the responsible person to establish metering installation compliance.

4.10.4 Multiplier Validation

For metering installations that utilise instrument transformers, (voltage transformers and/or current transformers), the Metering Provider must verify the connected ratios of all instrument transformers on site and calculate the constant to be applied to the *meter* readings and *metering data*.

Metering Transformer Burden Measurement 4.10.5

For metering installations that utilise instrument transformers, (voltage transformers and/or current transformers), the Metering Provider must undertake measurements of the actual secondary burdens of the instrument transformers pertaining to the metering installation to ensure that the burdens applied to the *instrument transformers* are within the rated burden specified on the nameplate.

4.10.6 Phase Sequence

The Metering Provider must verify that the metering installation voltage phase sequence relationships are correct unless the Metering Provider can verify to the satisfaction of AEMO the accuracy of the meter type when nonstandard phase sequence is applied.

4.10.7 **Vector Relationships**

a) For metering installations that utilise instrument transformers, (voltage transformers and/or current transformers), the Metering Provider must verify that the combined current and voltage phase relationships at the meter terminals are correct.

4.10.8 Meter Validation

- For all *metering installation* types, the *Metering Provider* must verify that the meter programming parameters, display and error functions are all correct in accordance with manufacturer specifications. This includes the measurement of the forward rotation of energy applied to the *meter*, and verifying that the correct pulse rates (for interval meters) have been programmed into the meter for the best possible resolution of energy data measurement and recording.
- b) For metering installations that involve the use of instrument transformers, the Metering Provider must validate register readings to the measured customer load where applicable and possible. The validation process may also include a timing check by comparing the output on the meter display and/or pulse indicators against load and time.
- For sites involving remote acquisition of metering data, the Metering Provider must have processes in place to aid in the validation of interval metering data with the responsible person and/or Metering Data Provider.
 - i. This process must confirm that remote communication with the *meter* is established and is of sufficient quality to support communication and metering data transfer.
 - This verification is to be done at the time of *meter installation*, *meter* ii. change, meter test or meter reprogramming. Refer also to section 4.11 relating to the meter change process for Type 1, 2, 3 and 4 sites.

December 2014 Page

- The Metering Provider must also aid any end to end verification of the iii. measured and stored interval metering data within the meter's buffer with the interval metering data value(s) as remotely read and stored within the Metering Data Provider's metering data services database.
- The Metering Provider must have processes in place to aid in the iv. validation of metering data with the responsible person and/or Metering Data Provider. Where a validation failure has occurred, the Metering Provider is required to have a process in place to verify metering installation compliance.

4.10.9 Sites that cannot be validated

- For sites that cannot be fully validated, the Metering Provider must inform the Metering Data Provider and the responsible person that the metering installation cannot be fully validated. The Metering Provider is required to liaise with the responsible person to undertake other alternative measurements and commissioning checks that enable the *responsible* person to agree that the metering installation is compliant.
- b) The Metering Provider must undertake one or more of the following checks:
 - i. Utilisation of *meter energy* measurement to calculate *load* / demand and that this value is reflective of expected magnitude;
 - Use of a dummy load or phantom load box to verify correct *meter* ii. energy measurement;
 - iii. Wiring checks which visibly verify correct connection and phase relationships of voltage and current circuits; or
 - iv. Compare *meter* measurement of *energy / load* with an alternative measurement of demand, current etc.

4.10.10 Alarm settings

- Where the *meter* supports alarm functionality as an attachment to the *interval* metering data, the Metering Provider is required to enable the following alarms:
 - i. Power failure:
 - Voltage failure; ii.
 - iii. Pulse or interval data overflow;
 - iv. Checksum error: and
 - Time reset. ٧.
- Where there are alarm sensitivity settings, these must be set at appropriate levels to ensure meaningful alarm outputs (e.g. for contestable customer supplies a Voltage drop of -15% is nominally appropriate).

4.10.11 In situ testing of type 1, 2, 3 and 4 metering installations

- Where a *Metering Provider* undertakes to perform in situ testing of a type 1, 2, 3 and 4 metering installation, the Metering Provider must note the start and end times of the meter test and any applicable register readings and record these on the relevant test sheet.
- On completion of the tests the *Metering Provider* must ensure that the following is undertaken before the *Metering Provider* leaves the site:
 - Ensure that the *metering installation* is commissioned into service and that all connections are correct, tight and that the measurement system

Page of 35

- is operating correctly. Adherence to section 4.10, General Commissioning Requirements, is required;
- ii. The Metering Provider is required to contact the relevant Metering Data Provider and verify that the Metering Data Provider still has operational communications with the meter and that the communications are of sufficient quality to support metering data transfer; and
- iii. The Metering Provider is required to inform the Metering Data Provider of the start and end times of the test and the metering details concerned. (This is to facilitate the *Metering Data Provider* validating and substituting out any erroneous metering data as a result of the meter test).
- c) On completion of the *metering installation* test, the *Metering Provider* is required to provide to the relevant *Metering Data Provider*, by formal communication, confirmation of the above details and test times. Refer section 4.12 for *meter* change process performance requirements and Attachment 1 for example forms. These forms are available from AEMO's website.

4.11 **Meter Change Process**

- 4.11.1 The Metering Provider must only undertake meter churn when the request to do so has been provided by a responsible person or the financially responsible Market Participant for the Market Load in MSATS and:
 - a) they are the Meter Provider in MSATS, or
 - there is a change request nominating them as the Metering Provider and the change request has passed the objection logging period in accordance with the MSATS Procedures.
- 4.11.2 Prior to conducting meter churn from a type 1, 2, 3 or 4 metering installation to a type 1, 2, 3, 4 or 5 metering installation (and to a type 6 subject to the jurisdictional reversion policy in the metrology procedure), the Metering Provider must make reasonable endeavours to contact the current Metering Data Provider and:
 - Provide the current *Metering Data Provider* with details of the new *Metering* Data Provider and new Metering Provider and their MSATS participant identifiers; and
 - Request and verify that the current Metering Data Provider undertakes a final read to recover any metering data since the meter was last interrogated.
- 4.11.3 Prior to conducting meter churn from a type 5 or 6 metering installation to a type 1, 2, 3, or 4 metering installation, the Metering Provider must make reasonable endeavours to contact the current Metering Provider and/or Local Network Service Provider and:
 - a) Provide confirmation that a meter change is to be carried out; and
 - Provide the new *Metering Provider's* details including the MSATS participant identifier.
- On completion of the *metering installation* the *Metering Provider* must ensure that 4.11.4 the following is undertaken before the *Metering Provider* leaves the site:
 - Note the metering installation details, times, and any accumulation readings on the relevant Meter Change Installation Notice or site commissioning test sheet:

Page of 35

- Ensure that the metering installation is commissioned into service and that all b) connections are correct, tight and that the measurement system is operating correctly. Adherence to section 4.10, General Commissioning Requirements, is required; and
- c) For a site remaining a type 1, 2, 3 or 4 metering installation, make reasonable endeavours to contact the new *Metering Data Provider* to verify:
 - that there are operational communications with the *metering installation*;
 - that the communications are of sufficient quality to support the remote acquisition of metering data;
 - iii. the commissioning time of the metering installation; and
 - iv. the details of the old Metering Data Provider including their MSATS participant identifier.
- 4.11.5 The Metering Provider is required to provide to the new Metering Data Provider formal confirmation of the above *metering installation* details and commissioning times. Refer section 4.12 for meter change process performance requirements and Attachment 1 for example forms.
- The Metering Provider must have a process to ensure that MSATS is updated as 4.11.6 follows:
 - a) for a type 6 to a type 1, 2, 3, 4, 5, or 6 *Meter Churn* meters are:
 - removed in MSATS on the day of the physical removal of the meter(s).
 - ii. installed in MSATS on the day of the physical installation of the meter(s).
 - b) for a type 1, 2, 3, 4, or 5 to a type 6 *Meter Churn* meters are:
 - removed in MSATS on the day after the physical removal of the i. meter(s).
 - installed in MSATS on the day after the physical installation of the meter(s).
 - for a type 1, 2, 3, 4, or 5 to a type 1, 2, 3, 4, or 5 *Meter Churn* meters are:
 - removed in MSATS on the day of the physical removal of the meter(s).
 - ii. installed in MSATS on the day of the physical installation of the meter(s).

Metering Installation Change Process 4.12

In relation to the performance requirements tabulated below, and shown in Figure 4.12.1 1 'Performance Requirements -Time Schedule' in section 4.13, the following details apply to the performance of a metering installation by a Metering Provider.

TASK ID (AS IN FIG 1)	REQUIREMENT	DETAIL
1	Process MSATS Change Request notification (one business day) Accept/Reject Work.	The Metering Provider must process the MSATS notification that nominates them as an MPB for a connection point. This notification should be also taken as a metering installation advice.

December 2014 Page of 35

TASK ID (AS IN FIG 1)	REQUIREMENT	DETAIL
2	Receive advice from responsible person / B2B Process (one business day).	The Metering Provider is required to acknowledge the receipt of notification or otherwise within one business day of receipt of any metering installation advice via formal communication.
3	Notify Metering Data Provider and/or responsible person by formal communication, advising of the metering installation change (one business day).	The Metering Provider must give the notified party a period to comment on the proposed meter change (i.e. password availability, compatibility issues if any etc).
4	Await notified party comment (two business days).	The Metering Provider must wait two business days for any comment from the Metering Data Provider and/or responsible person re the proposed meter change.
5	Obtain site information from current <i>Metering Provider</i> , LNSP and MSATS (two business days).	The Metering Provider is required to request all necessary installation and site information from the current Metering Provider, Local Network Service Provider, financially responsible Market Participant and MSATS where available.
6	Provision of requested Installation Information (two business days).	The current <i>Metering Provider</i> is required to provide the requested <i>metering installation</i> information for a <i>connection point</i> to a New <i>Metering Provider</i> .
7	Accept / Reject work (one business day).	The Metering Provider is required to advise the financially responsible Market Participant and/or responsible person whether the Metering Provider accepts responsibility for the installation work etc.
		This includes, where relevant, submitting any objection 'OBJ' code into MSATS, which must be provided within five <i>business days</i> of the MSATS notification.
		An action of not objecting constitutes acceptance.

 December 2014
 Page

 21
 of 35

TASK ID (AS IN FIG 1)	REQUIREMENT	DETAIL
8	Schedule and undertake work (up to 10 business days).	 The Metering Provider must ensure that the installation work is scheduled and completed within this time frame. This item includes: Program and readiness of installation equipment; Site access and any outage arrangements in accordance to jurisdictional regulatory requirements; Change of required metering installation equipment; Test and commissioning of installation in conjunction with Metering Data Provider where applicable; Preparation and submission of relevant advices.; and Relevant registration information is received by the Local Network Service Provider within 2 business days of the field works performed at the connection point.
9	Update systems (up to five business days). The Metering Provider is required to commence this update within five business days of the completion of item 8.4 above (test and commissioning of installation).	The Metering Provider is required to ensure that all relevant NMI Standing Data information for the connection point is updated. This process includes: 1. Entry and update of relevant NMI Standing Data information into the Metering Provider's systems and databases; 2. Provision of Meter Change installation Notice to the respective responsible person and Metering Data Provider(s) for the connection point, and 3. Entry of relevant NMI Standing Data into MSATS must occur within five business days of the Metering Provider role for the connection point becoming effective within MSATS.
10	Return removed metering installation component(s) (up to ten business days).	The Metering Provider is required to return any removed metering installation component(s) to its owner. Reasonable endeavours are required in the packaging of the equipment to ensure its return in good order.
11	Provide / support registration validation test data (up to three business days)	Where support is still required to the responsible person and/or Metering Data Provider in the validation process of the metering data, the Metering Provider must ensure that this is carried in an effective manner.


 December 2014
 Page

 22
 of 35

4.13 Performance Requirements

- 4.13.1 The Metering Provider must complete all metering installation changes within the following timeframes, unless the *Metering Provider* is carrying out a *metering* installation change to meet a Network Service Provider (NSP) regulated obligation. For metering installation changes to meet a NSP regulated obligation, the installation period will be established in agreements between the NSP and the *Metering Provider* to reflect the NSP's regulatory obligations.
 - The Metering Provider must use reasonable endeavors to complete Tasks 1 to 8 inclusive (as listed in the above table) within a maximum period of 20 business days.
 - b) The performance requirements for Tasks 1 to 8 inclusive apply to all contestable metering installation changes for which the Metering Provider must obtain:
 - A minimum performance requirement of 95% for all *metering* installation changes (within the maximum period); and
 - A 100% compliance for all metering installation changes within twice ii. the stated maximum time frame, unless a separate time frame has been agreed to in writing with the responsible person.

Figure 1: Performance Requirements - Time Schedule

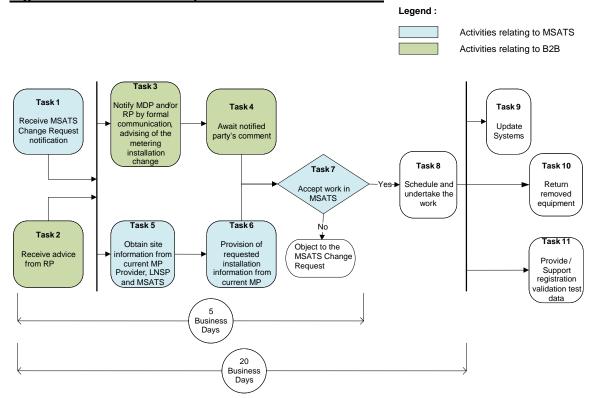

Refer to sections 4.12, 4.13 and 4.14 for clarification of Task items.

Although the tasks have been shown as sequential activities some of the tasks may overlap with one another

4.14 Reporting

4.14.1 AEMO will undertake to provide regular reports to the Metering Provider relating to quality and timeliness of deliverables as part of AEMO's performance monitoring and benchmarking processes.

23

- 4.14.2 The content of the *Metering Provider* reports will reflect performance monitoring across all Metering Providers with respect to the deliverables of this Service Level Procedure.
- 4.14.3 The frequency of the *Metering Providers* reports provided by *AEMO* will be nominally monthly, unless otherwise advised.

4.15 **Corrective Action**

- 4.15.1 The *Metering Provider* is required to take corrective action on:
 - Any reported instances of non-compliance documented within either the monthly reporting process or through the scheduled Metering Provider audit process; and
 - b) Any reported or found *metering installation* faults for which that *Metering* Provider has been engaged by the Responsible Person to maintain, in accordance with clause 4.24 of this procedure.

Meter Change Information Requirements 4.16

- 4.16.1 The Metering Provider must provide, where applicable to the specified metering installation, the following information in an electronic format to the responsible person, relevant Market Participants or any other Metering Providers and Metering Data Providers who have a right of access to the information, as a minimum, pertaining to any *metering installation* changes.
- 4.16.2 Equipment installation

INFORMATION CATEGORY	DETAILS
NMI details	NMI
	Check Sum
NMI address	Street
	State
	Postcode
Market Participants	Financially Responsible Market Participant
	Responsible Person
	Local Retailer
	Metering Provider B
	Metering Provider C
	Metering Data Provider
	Local Network Service Provider
Modem details	Modem Make
	Modem Type
	Modem Plant
	Modem Phone
	Modem Baud
	Modem Carrier

December 2014 Page of 35

INFORMATION CATEGORY	DETAILS
Meter details	Meter Make
	Meter Type
	Meter Rating
	Meter Serial Number
	Meter Pulse Rate
	Meter Multiplier
	Unit Address
	Load Survey Interval
	Programmed Current Transformer Ratio
	Programmed Voltage Transformer Ratio
Current Transformer(s)	Current Transformer Make
	Current Transformer Type
	Current Transformer Class
	Current Transformer Ratios
	Current Transformer Tap
	Current Transformer Rated Burden
	Current Transformer Serial Number Phase 1
	Current Transformer Serial Number Phase 2
	Current Transformer Serial Number Phase 3
	Current Transformer Secondary Wiring Size
	Current Transformer Secondary Wiring Route Length
	Primary Current
	Secondary Current
Voltage Transformer(s)	Voltage Transformer Make
	Voltage Transformer Type
	Voltage Transformer Class
	Voltage Transformer Ratios
	Voltage Transformer Tap
	Voltage Transformer Rated Burden
	Voltage Transformer Serial Number Phase 1
	Voltage Transformer Serial Number Phase 2
	Voltage Transformer Serial Number Phase 3
	Voltage Transformer Secondary Wiring Size
	Voltage Transformer Secondary Wiring Route Length

4.19.1 Equipment Removal

INFORMATION CATEGORY	DETAILS						
NMI details	NMI Check Sum						
NMI address	Street State						

 December 2014
 Page

 25
 of 35

INFORMATION CATEGORY	DETAILS					
	Postcode					
Market Participants	Old Metering Data Provider ID Old Metering Provider ID					
Meter details	Meter Make(s) Meter Type(s) Meter Rating Meter Serial number(s)					
Current Transformer(s)	Removed Current Transformer Serial number(s) Removed Current Transformer Type(s) Removed Current Transformer Make(s)					
Voltage Transformer(s)	Removed Voltage Transformer Serial Number(s) Removed Voltage Transformer Type(s) Removed Voltage Transformer Make(s)					
Removal details	Service Order Number Work Order Number Meter Remove Date Meter Remove Time					
Meter reading(s)	Meter Reading(s) Data downloaded (Type 1, 2, 3 and 4) Date/time of download					

4.21.1 **Forms**

Sample forms are provided in Attachment 1, a Microsoft Excel version of these forms is available from AEMO on request.

4.22 Asset Management Plans

4.22.1 The Metering Provider must develop, maintain and execute a Metering Asset Management Plan (MAMP) for all metering installation assets for which the Metering Provider has been engaged to provide maintenance and testing services by the responsible person, which is to be approved by AEMO.

4.23 **Testing and Inspection**

- 4.23.1 The Metering Provider, where engaged by the responsible person to carry out testing and inspection services of metering installations, must do so in accordance with S7.3 of the Rules.
- The Metering Provider is required to provide on request test results for metering 4.23.2 installation equipment to relevant Market Participants of the connection point or any other Metering Providers pertaining to the connection point.

Management of Metering Installation Faults 4.24

- 4.24.1 A Metering Provider who identifies a metering installation malfunction must advise the Metering Data Provider and responsible person within two business days.
- 4.24.2 In accordance with clause 7.3.7 of the Rules:

December 2014 Page of 35

- a) If a *metering installation malfunction* occurs, repairs must be made to the *metering installation* as follows:
 - i. For a type 1, 2 or 3 metering installations, within two business days of detection. The Metering Provider must notify the Metering Data Provider so that any relevant substitutions can be made to the metering data.
 - ii. For a type 4, 5 or 6 metering installations, within 10 business days of detection. The Metering Provider must notify the Metering Data Provider so that any relevant substitutions can be made to the metering data.
- b) If the repairs cannot be made within the time specified as in clause 4.24.2 a) subsection (i) and (ii), the *Metering Provider* must notify the *responsible person*, so that the *responsible person* can apply to *AEMO* for an 'Exemption'.

4.25 Telecommunications

- 4.25.1 The *Metering Provider* must notify the *Metering Data Provider* and *responsible person* if communications equipment is to be temporarily disconnected such that it may affect the *remote acquisition* of *metering data*.
- 4.25.2 The *Metering Provider* must assist the *responsible person* and/or the *Metering Data Provider* with the manual collection of *metering data* from the *metering installation* where *remote acquisition* becomes unavailable.
- 4.25.3 The application of clause 4.25.2 of this procedure excludes instances of a telecommunication network failure where the logistics of manual collection of metering data from significant volumes of metering installations is not practical. This does not remove the obligation of the responsible person to resolve the instance of the telecommunication network failure.

4.26 Systems

4.26.1 Systems procured or used by the *Metering Provider to pro*vide the services specified in this Service Level Procedure shall be maintained in reasonable working condition in an accessible and auditable manner.

4.27 Quality systems

- 4.27.1 In accordance with the *metrology procedure* requirements and S7.4 of the *Rules*, the *Metering Provider* must:
 - For services in relation to type 1, 2, 3 and 4 metering installations have and retain AS/NZS ISO 9002 Quality Certification or achieve same within 12 months of accreditation as a Metering Provider with AEMO; and
 - b) For services in relation to type 5 and 6 metering installations, have and retain a quality system that meets clause S7.4.4 of the Rules and relevant clauses of metrology procedure Part A to the satisfaction of AEMO. AEMO has traditionally accepted quality accreditation to the ISO9001 or ISO 9002 standard, subject to the respective business system design and level of accreditation, as meeting this requirement.

4.28 Disaster Recovery

4.28.1 The *Metering Provider* must have a 'Disaster Recovery Plan' in place that, in the event of an IT system failure, the system is returned to normal operational service within five *business days*. Recovery to operational service is measured by evidence that:

December 2014 Page 27 of 35

- The software and the most recent back-up of data has been restored to a) operational service within the five business days; and
- b) That there is no outstanding processing or delivery of relevant *NMI Standing* Data to AEMO and Market Participants.
- 4.28.2 It is a requirement of the *Metering Provider* to demonstrate evidence to the effect that:
 - a) Detailed documentation of a Disaster Recovery Plan is maintained fully up to date. The documentation to show revisions and 'last check date':
 - The Disaster Recovery Plan is witnessed and dated at least annually by the Metering Provider as being current for the systems and processes in place; and
 - The Disaster Recovery Plan has been subjected to an annual end-to-end test that facilitates both a 'fail-over' from and 'recovery' back to the production system.

4.29 **Security Requirements**

- 4.29.1 The Metering Provider is to manage security services for each specified metering installation in accordance with the Rules and metrology procedure requirements.
- 4.29.2 The Metering Provider has obligations with respect to the security of metering installations. These obligations relate to:
 - Physical Security of the *metering installation*:
 - Metering installation locks, seals and notices; b)
 - c) IT security of *metering* equipment;
 - *Metering* equipment passwords;
 - e) Metering Providers IT systems and databases;
 - f) Management of data access; and
 - Management of security equipment.
- 4.29.3 Clause 7.4.1(b) of the Rules requires the Metering Provider to be responsible for providing and maintaining security controls of a *metering installation* in accordance with clause 7.8.2 of the Rules. Security controls relate to:
 - The selection and use of *metering* equipment (e.g. multi-password level meters);
 - b) Metering installation site security (locks, seals, access etc);
 - Protection of calibration in the *meter*, and
 - d) Protection of internal *energy data* in the *meter*.
- 4.29.4 The Metering Provider must carry out all security obligations as required and requested by the responsible person and AEMO.

4.30 **Rights of Access to Data**

- 4.30.1 The Metering Provider must facilitate access to the metering installation in accordance with clause 7.7 of the Rules.
- Note: Notwithstanding rights of access to data, the responsible person will be the 4.30.2 final authority to allow physical access to the meter beyond those controlled by the Metering Provider and the Metering Data Provider.

4.31 **Metering Installation Security**

Page 28

4.31.1 Revenue Protection issues

a) The Metering Provider shall not remove an asset if there is evidence of tampering or electricity theft. The Metering Provider must inform the existing Metering Provider and/or responsible person, and the metering installation shall remain as is until the responsible person has investigated. The new metering equipment can only be installed once the responsible person has given permission.

4.32 Safety

- 4.32.1 *Metering Providers* must maintain appropriate levels of OH&S policies according to jurisdictional and legislative requirements. Minimum requirements include the identification of risks and hazards and application of control measures prior to any work being performed on site.
- 4.32.2 It is expected that relevant site safety information is openly shared amongst Metering Provision businesses, including the dispatch of safety alerts where applicable.
- 4.32.3 The *Metering Provider* must satisfy / perform any site induction requirements as required by the customer.

4.33 Work Standards

- 4.33.1 The *Metering Provider* must comply with the *Rules* and all relevant procedures under the *Rules* and the current:
 - a) AS3000 Wiring Rules;
 - b) ACA Communications Cabling requirements (where applicable); and
 - c) jurisdictional and *Network Service Provider* requirements.
- 4.33.2 In circumstances where the *Metering Provider* identifies an installation that does not comply with clause 4.33.1 of this procedure, it is expected that the *Metering Provider* will inform the *responsible person*, appropriate jurisdictional administrator and/or the NSP (as appropriate).

4.34 Embedded Networks

4.34.1 The *Metering Provider* must provide embedded network functionality where required as defined in the *Rules* and authorised procedures under the *Rules*.

4.35 Time Synchronisation

- 4.35.1 The *Metering Provider* when installing, testing and maintaining the *metering installation* must ensure the time setting of the *metering installation* is referenced to *Eastern Standard Time* in accordance with clause 7.12 and S7.2 of the *Rules*.
- 4.35.2 The *Metering Provider* must provide passwords to the *Metering Data Provider* as required by clause 7.8.2 (j) of the *Rules*.

4.36 Audits

- 4.36.1 The *Metering Provider* must undertake all services in a manner that is auditable by *AEMO*.
- 4.36.2 *AEMO* will carry out periodic random audits of *metering installations* in accordance with clause 7.6.3 (d) of the *Rules*. These audits are conducted by *AEMO* appointed auditors which are currently undertaken on an annual basis.
- 4.36.3 The *Metering Provider* must undertake to provide all reasonable assistance to *AEMO* in discharging its obligations under the *Rules* in relation to *metering*

December 2014 Page 29 of 35

- installations, including co-operating with and providing assistance to AEMO when AEMO periodically reviews each metering installation and the qualifications of each Metering Provider.
- 4.36.4 AEMO will undertake periodic review certification, to a negative assurance level of the Metering Provider's system, process and procedures to assess the Metering Provider's compliance to the Rules, Procedures under the Rules, this Service Level Procedure and implementation of any approved Metering Asset Management Plan.
- 4.36.5 All scheduled reviews will be through a centralised review process established by AEMO and will be undertaken at the Metering Provider's own costs.
- Where a review is conducted under this Service Level Procedure, the *Metering* 4.36.6 Provider must, at its own cost, provide all reasonable assistance including making databases, equipment and premises available for inspection, making personnel available for questioning, and providing copies of any data or information as requested.
- 4.36.7 Scheduled reviews of the *Metering Provider's* system will be as follows:
 - The first audit to be nominally 24 months after accreditation at a time that suitably coincides with AEMO's market audit report.
 - b) Further and subsequent audits are to be every 24 months and at a time that suitably coincides with AEMO's market audit report, or
 - At AEMO's direction based on previous satisfactory audit reviews.
- 4.36.8 The Metering Provider is required to establish with AEMO the business days for audit reviews in advance. A minimum of 15 business days notice will be given to the Metering Provider for the provision of any specific data requests as part of the audit.

4.37 Non Compliance and Deregistration

- 4.37.1 The 'Service Provider Compliance Assessment and Deregistration Procedure' (established under clause 7.4.3 (a) of the Rules) shall be used by AEMO to assess a non-conformance or breach by a Metering Provider.
- 4.37.2 Subject to the assessed breach level as defined within the 'Service Provider Compliance Assessment and Deregistration Procedure', actions that may be taken by AEMO in the event that the Metering Provider has failed to take corrective action, includes:
 - a) Loss of accreditation of the Metering Provider;
 - b) Deregistration from categories of accreditation;
 - Suspension from operation in the *National Electricity Market*.
 - d) Other applied limitation or level of restriction; or
 - e) Any combination of the above.

December 2014 Page

5. ATTACHMENT 1 - EXAMPLE FORMS

	ı	Viet	er F	Read and	l Me	ter	Ch	ange :	She	et											
								Ū				Ī.	Work Order No								
												1,)ate l	ssued	INO						
Site	Details											-	NMI	Jouca							
Add													INIVII								
	urb / Localit	V										IE	Postco	nde							
Con		,											hone								
	testable					Com	ms.	type					110110		Pro	gram	n ID				
LNS						ailer		.,,,,,			MP					ME	OP				
	(if change	d)		S						Е											
	Read Reas			•				•					•		•						
								Meter(s) Re	ad Deta	ils O	Only									
I/R	Time	ľ		er / Relay erial No	(Na	MP me Pl	ate)	Regis ID	ter	Rea	ding	J	Multi	plier	Dials	S	Equipmen Type	t	Face Read		
Щ					1																
\sqcup					1							_									
$\vdash \downarrow$					1		_					\dashv									
\vdash					1		_					+						_			
\vdash		-			╄		\dashv					+						_			
\vdash					1		\dashv					-+									
					-							-									
					-		\dashv					-									
												-									
					1		\dashv					-+									
Elec	tronic Mete	r - R	emo	ved / Read	<u> </u>					Meter Read Only					N	1eter	removed				
Mete	er No					Multiplier					Meter Type			e							
CT F	Ratio					VT Ratio				Meter			r Prov	vider							
Face	e Read		Time						MD	IDP/ Profile Read Com				eted							
	Register Number		Re	eading	Di	ials Register Number				Reading			Dials Register Number				Reading		Dials		
	Tarribor																				
												1									
												1									
												1									
												1									
Com	ments	<u> </u>				<u> l </u>								ı							
Com	pleted By										Date	е					Network Notified				

 December 2014
 Page

 31
 of 35

		L	V Met	erir	ng Insta	alla	tion S	heet										
											٧	Vork C	order N	ol .				
												ate Is						
Site Det	tails											NMI	1					
Address																		
Suburb		v									P	ostco	de					
Cabarb	Localit	,										001001	10					
Contact											Ь	hone						
	ontact Phone ite Warnings																	
Meter P																		
ivietei F	OSILIOIT																	
		Asbe	estos P	ane	I/Switch	boa	rd				All Equipn	nent S	Sealed					
PRE CI	HECKS	Mete	ers pulsi	ing /	rotating	in c	orrect di	rection			Existing S	Seal N)					
					e Correc						Links in C			tion				
Meter Ir	nformat	ion									Meter No							
Manufad	cturer										Current R	ating	(ie 5-15	amp)				
Model											Voltage R			- 17				
Manufad	cturers (Cat. N	۱o.								Meter Ke							
Program											Baud Rate	e						
Meter P	oint										Feeder N							
Date &		rrect	on Met	er &	PC						Meter Mu							
В			1	0. 0.								т.ро.						
Current	Transf	orme	r Detai	le														
Phase			Make				e Class		Burden	Burden Ratio			able I	Polarity				
A	Cornar		Wart		00110		1 7 5		Olass		Baraon	Barach Ratio		/ tvalid	1010	tatioo	1 Oldrity	
В									-					1				
C														1				
Ancillar	v Fauir	men	t Detail	S			l.				l			1		1		
Equipme			Asse		,		Manufac	turor	Т	Con	nms Mediu	ım	M\/an	Dial Num	her			
Ечирпп	CIIC		7,000	, t 1 V C	,		Mariarac	turci	+	001	IIIII3 MCaic	AIII	101 0 30	Diai Nuili	DCI			
									+									
						+						FPI	R zone	l				
									+		Read Type							
Genera	l Chack	•							+				1100	а туро				
Phase S			Testhlor	·k			I			Inc	trument Se	t Hea	· Name		1			
Meters p	oulsing/r	otatir	na in co	rrect	direction	n					libration Da			Λ/				
Correct	volte wit	h cur	rent (vis	(leus	i directio	<u>'' </u>					Connected							
Correct volts with current (visual) Phase out voltage mains to											uipment Ea		uliai L	21111				
CT Star Connected												s fitted						
Phase Sequence at Meter										Check potential fuses fitted Weather Exposure								
Drawing Number										CT's located in Main Switchboard								
Comme		,1								ĮO I	3 located i	ii iviaii	OWILCI	iboard				
Comme	nis																	
Comple	ted By										Date							

 December 2014
 Page

 32
 of 35

LV Metering Commissioning Sheet																		
										Work Order No								
					Date Issued													
NMI																		
Burden Measurements																		
Rated Burden		Ratio									M	easured	len					
Ohms or VA		Meter Multipli	ier	r			ondary rrent		Seconda Voltage	-	Ohms	V/A		Alternate				
Cable Size	2		Α	_			Voltage	,	Offilis	VIP	1							
Max Route len		Cable Route (Mtrs)																
					С													
Test Instrume	nts																	
General Checks																		
Calibration Date Drawing No																		
Correct Incorrect	Phase :	Sequence at	Testblo	ock				Correct Pha			se Sequen	ce at Me	eter					
	No CT Sec	ondary Star (Connec	ted				es		S2 (Connected	to Neut	ral E	arth				
CT Polarity	(P1 Line Si	de)					C	heck	correct	volts	s with curre	ent (visu	al)					
Yes	No	B Phase volta	age con	necte	ed to e	earth.												
Check conn	ections tight				ises a	s 10 a	amp		All	equip	ment cover	ed & sea	aled					
Equipment I						_			pulsing/r	otatin	g in correct	direction	1					
Meter Date & Til A phase potentia		annostad	ı	_	Actual	Date	& Tim	e		- 1			1					
B phase potentia				@		+		+										
C phase potentia				@														
Current Transfe				œ		<u> </u>												
Phase Primary Secondary K = Prim / sec Nominal K Angle / P.F (sec) % Error										Error								
A																		
В																		
С																		
Current / Voltage	ge Phase Ai								0 Dl-	\	D:							
Phase	Voltage	la angle	lead	/ lag	_				3 Ph	ase v	ector Diagra	am						
A - n	vollago	ungio	ioaa	, lug		0												
B - n																		
C - n									X	3	X	×						
A - B								1		3		Y						
Phase	\/altaga	lb	اممما	/				F		Va	-n	Ŧ						
B - n	Voltage	angle	lead	/ lag				+		Vo.n	Vb-n	+						
B - C								t		• • • • •	***	I						
		lc					2	40			**	120						
Phase	Voltage	angle	lead.	/ lag					×		\sim	×						
C - n									*	7+	+++							
C - A									•					1				
kWh Test		Start Time			Start I	Read			Stop T			Stop R	ead					
Energy value		MDP	P Energy	y Val	ue				% Diffe	erence	е							
Final Checks		***					A.II											
Links returned to									tions tigh		fo 9 Class							
Equipment covered and sealed Seal No Wire 1						Site left operationally Safe & Clean Seal Type Seal Type												
Seal No Wire Type Seal Type Equipment Installed																		
Meter			Con	nms l	Unit						Fuses							
Test Block Sharing Unit Isolation Ur Antenna Type Active / Neutral Links Pulse Outp																		
Antenna Type											Pulse C	Output						
Mini Gateway Current Transformers MFTC Details of work carried out																		
2.1.2 04.1100 04.																		
Validation Details / Comments /"Other" Please define																		
Completed By								Da	ate									

 December 2014
 Page

 33
 of 35

HV Metering Installation Sheet																
								Work Order No								
								Date	Date Issued							
Site Details					I NMI I											
Address									•							
Suburb / Localit	У							Posto	ode							
Contact								Phone	е							
Site Warnings																
Meter Position																
Install / Alteration			aintenance		Commiss						Change					
Pre Checks				nt of site carried out Links in position Equipment sealed otating in correct direction & consumption registering Seal No									7			
Meter Information Meter No																
Manufacturer			Current Rating (ie 5-15amp)													
Model			Voltage Rating													
Manufacturers (Cat. No.		Ke (watt hrs / pulse)													
Program ID			Baud Rate													
Current Transf	ormer In	format	tion													
Phase Seri	M	lake	Series	Туре)	Class	Bur	den	F	Ratio	Avai	lable	Ratios			
В	В															
Α																
С																
Voltage Transf	ormer In	format	tion													
Phase Seri	hase Serial No		lake	Series	Туре	e Class		Burden		Ratio		Nom		inal K		
Α																
В																
С																
Communicatio	ns Equip	ment														
Equipment Asset			Ю	Manufa		Model / Type)	Phone Number								
Phone																
Modem									EPR	zone						
Isolation																
Sharing Unit																
Comments																
Completed By							Dat	e								

 December 2014
 Page

 34
 of 35

		ΗV	Meter	ing Comm	iss	ioning Sh	neet												
											Work	Order I	No	1					
												Date Is	ssued						
												NMI							
Bur	den Measurem	ents	СТ									•							
R	Rated Burden			Ratio			Sec	onda	ry Cur	rent	Sec	ondary	Voltag	е	N	1ea:	sured Burden		
Ohms or VA			Meter Multipl										Ohms	T	VA				
	Cable Size			Cable Route (N	/Itrs)		Α									T			
N	lax Route len			=			В									T			
							С												
Bur	den Measurem	ents	VT																
Rat	ted Burden VA			Ratio			Secondary Current			Sec	ondary	Voltag	е	N	1ea:	sured Burden			
	or Siemens			Meter Multipl	ier												mS		
	Cable Size			Cable Route (N	/Itrs)		Α												
N	lax Route len			1			В												
				•		•	С									T			
Te	st Instrume	nts																	
Gen	eral Checks																		
Ca	alibration Date								Draw	ing N	No								
						Volta	age Tr	ansf	ormer				-						
	Correct		If circuit is	s under load, ch	eck t		_					Check	conne	ctions	tight				
	Incorrect		appropria	ate for the voltag	e rat	ing of the Reve	nue M	∕leter.				Equipr	nent E	arthed	ı				
	Correct		Phase an	nd Polarity Checl	(- P	olarity mark on	all VT	s are	follov	ving		Check	ck fuses						
	Incorrect the same convention as the CT's.						cing th	ne sou	urce).			All equ	equipment covered & sealed						
	Correct Ratio Check - VT ratio matches the nam						te rati	o and	that t	he		Check meters pulsing/rotating in correct direction							
	Incorrect secondary connection is appropriate for the						applica	ation.											
	1					Curre	ent Tr	ansf	ormer										
	Correct									Corr	ect								
	Phase Sequence at Testbloo					ck	Incorrect			Phase Sequence at Meter									
	Yes No CT Secondary Star Conne				nect	nected					Yes No S2 C					Ne	eutral Earth		
	CT Polarity (P1 Line Side)							Check correct volts with current (visual)											
	Yes No B Phase voltage connected to earth. If "yes", Check B phase solid link in fuse carrier																		
	Check connections tight All equipment covered & sealed																		
	Equipment earthed							Che	ck me	ters	pulsi	ng/rotat	ing in o	correc	t direction	n			
Met	er Date & Time						Actu	al Da	te & T	ime									
Cur	rent Transform	er R	atio Chec	k															
	Phase	F	Primary Secondary			K = Prim / sec			Nominal K			<	Angle / P.F.(sec)				% Error (+/- 10% acceptable)		
	Α																		
	В																		
	С																		
Cur	rent / Voltage F	has	e Angle	la			1												
	Phase			3 Phase Vector Diagram															
			Voltage angle			lead / lag	4			0					0				
	A - B						1					X	+	! 	*				
	A - n						1					X		1	\sim				
	Phase	١	Voltage angle			lead / lag			7										
	B - C						1				1			1		1	-		
	B - n										I		Vc-n	Vb-n		1	•		
	Phase			lc							7	· · · · ·	•		***	+			
	Phase	١	/oltage	angle		lead / lag					240	1			Z	× 1.	20		
	C - B																		
	C - n						L						+	++	-				
Con	npleted By										Date	Э							

 December 2014
 Page

 35
 of 35